


TeleTransducer™

POINT-TO-POINT WIRELESS TELEMETRY SYSTEM



MADE IN USA
1 YEAR
WARRANTY

Affordable Point-To-Point Telemetry!...

For years, there has existed a need for an economical, basic telemetry system for point-to-point control. The most typical layout is that of a town with one pumping station and a single, remote water tower. There are literally thousands of such configurations across the nation. Yet in the past, Water Utilities have been forced to choose from two less-than-ideal solutions: High-Cost/High-Quality or Low-Cost/Low-Quality.

But today, Navionics Research is proud to introduce a third option: The low-cost *and* high-quality TeleTransducer™ System! How can both high-quality and low-cost be achieved simultaneously? – By utilizing select components that are recognized throughout the industry as top-of-the-line, while achieving low-cost through the simplicity of an astonishingly low parts count.

High-Quality Radio Communications...

Communications at each site are handled by a GE/MDS “TransNet” radio, a TeleWave Ice-Resistant Antenna, and “Heliax” coaxial cable – each of which is generally recognized as the gold standard within their respective industries.

High-Quality Pressure Sensor...

The pressure transducer at the water tower is the Preciseline by Keller America, a premium sensor that boasts 0.2%-accuracy, temperature compensation, and a limited lifetime warranty against lightning damage. And because this sensor is digital, the expense of an RTU or controller is eliminated from the water tower location.

User-Friendly Interface and Pump Controller...

The pump station features a 3-Inch Touch Screen Interface mounted on the front door of the enclosure. The touch screen displays the remote water tower level, and also enables setpoints to be changed within the on-screen menu system. The screen also features a backlight, so it’s even readable at night. Both Lead and Lag pump settings are available, and the controller may also be set to alternate the pumps. Because the system is *designed* for pump control, interaction is intuitive, user-friendly, and uncluttered.



Pump Station TeleTransducer™ Enclosure (Right).
Note the 3-Inch Touch Screen Operator Interface.



Water Tower TeleTransducer™ Enclosure (Right).
This Enclosure Does Not Contain An RTU or PLC.

Lightning and Power Protection...

The TeleTransducer™ doesn't reduce costs by eliminating lightning protection. Each enclosure contains three TVSS (Transient Voltage Surge Suppression) Sub-Systems: One for the 120VAC Main, a second for the output of the DC Power Supply, and a third for the coaxial cable/antenna. And each enclosure also contains a built-in battery backup system to maintain communications during power outages.



STANDARD FEATURES

Communications

Radio: GE/MDS TransNet
 Frequency Band: 900 MHz
 Antenna: TeleWave, 10db
 Coaxial Cable: LDF4-50 "Helix"
 Antenna TVSS: Polyphaser




Pressure/Level Sensing

Transducer: Keller America Preciseline
 Transducer Accuracy: 0.2%
 Transducer Output: ANALOG DIGITAL!
 Lightning Warranty: LIMITED LIFETIME!
 Temp Compensation: YES!
 Pit-Installable: YES!
 RTU: NOT REQUIRED!

Sample Touch Screen Menus...

Operator Interface

Display/Keypad: 3 Inch, 4-Color Touch Screen
 Backlight: YES!
 Available Settings: LEAD-ON / LEAD-OFF
 LAG-ON / LAG-OFF
 HI-ALARM / HI-ALARM-CLEAR
 LO-ALARM / LO-ALARM-CLEAR
 ALTERNATE / NO-ALTERNATE
 TRANSDUCER OFFSET

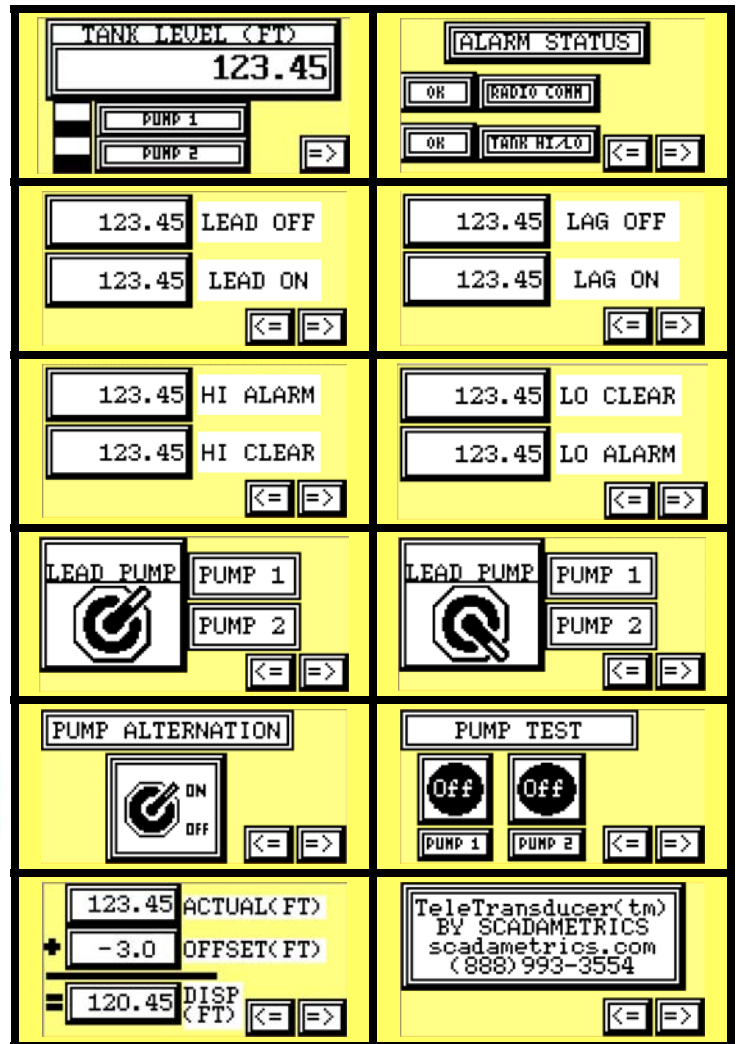

Power Protection

Power TVSS: YES!
 Battery Backup: YES!

Documentation

Submittals: YES, ALL COMPONENTS INCLUDED
 Installation Manual: YES!
 Operator Manual: YES!



SCADAmetrics
 scadametrics.com
 A Navionics Research Company
 Saint Louis, Missouri USA
 (636)405-7101